


MEROLOCK 3

TOP STAPLERS



WEIGHT
2.76 kg

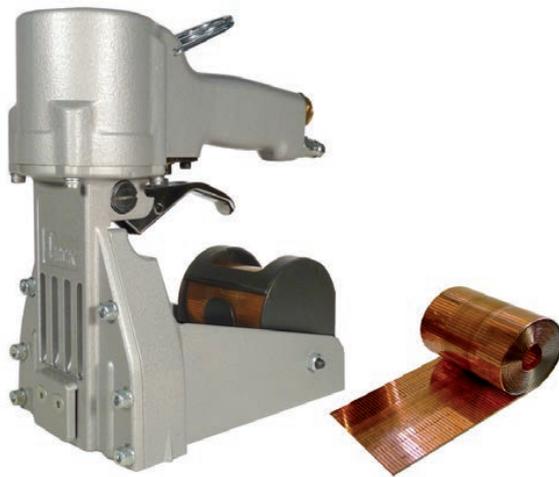

PNEUMATIC



STAPLE SIZE

Crown 32 mm
Leg 18 mm
Wire diameter
0.9 x 2.0 mm



CAPACITY

1,000 coiled
staples



APPLICATION RANGE

Economic closing of cartons made from corrugated cardboard with joining and overlapping flaps using clinching anvils. Suitable for single and double corrugated cardboard. Adjustable penetration depth to match the type of carton.

Ideally suited for a utilization in packaging lines, where a high degree of availability and efficiency must be ensured.

TECHNICAL DATA

Pneumatic stapler for staple type CR 1/34, leg length 18 mm, with sound suppressor and including an automatic clinching anvil return. Clinching anvils are specially hardened, which increases the serviceable life.

TYPE	MEROLOCK 3
Version	pneumatic
Device dimensions (length x width x height)	215 x 110 x 210 mm
Weight	2.76 kg
Leg length of the staples	18 mm
Load capacity: (Number of staples)	1,000
Air pressure	4 – 6 bar
Air consumption per stapling process at 6 bar	1.3 NL



YOUR ADVANTAGES

- Housing made from tempered steel to provide long durability
- Clinching anvils return instantaneously: up to 20 staple cycles/minute
- 1,000 staples per coil: up to 10 times less frequent recharging as compared to normal staplers

