

Pneumatic Stapling Device SGR 1 (special) with 1 Stapling Head A 20 - 42

Pneumatic Stapling Device SGR 1/QE A 20-42/VT with 1 stapling head A 20-42 for 4000 coiled staples, Cross stapling.





Pedestal with side arm and assembling table.

An aluminium sheet will be inserted into an assembling tool with a plastic part fixed on top. Both materials are displaced below the stapling position and fixed together.

Stapling triggered by pedal valve.

Max. throat depth: 600 mm.
pneumatic, for air pressure 4 - 6 bars.
Air consumption: 4.6NL/stapling.
Complete with maintenance unit.

Useful height:
(= anvil: pedal valve): 1200 mm.
Setting up space: 1000 x 1200 mm.
Overall height: 1655 mm.
Weight: 75 Kilo
Speed: up to 80 stapling operations/minute.

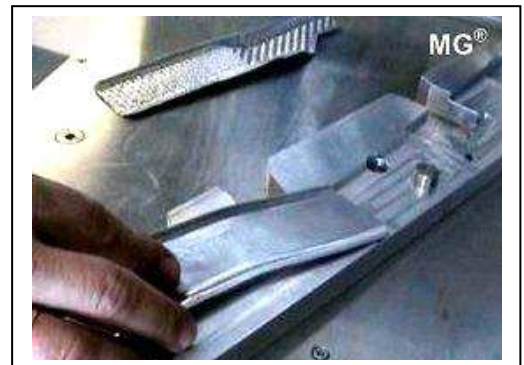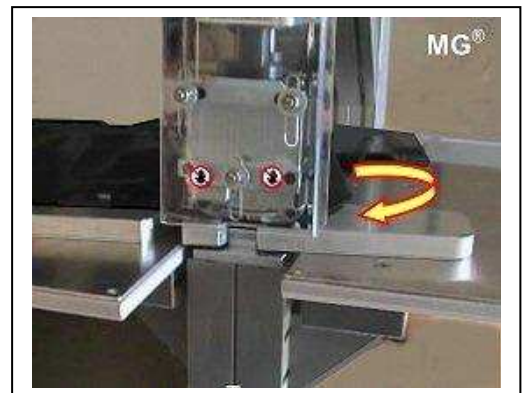

(see automatic applications: WG: A 4-11; A 4-12; A 4-13)

www.mezger.eu > applications > 3.Side Arm Stapling > Stapling Device SGR 1 (special) > with Video